



2N Access Unit

The innovative 2N Access Unit is based purely on IP technology. It combines the functions of a traditional controller with the functions of end access device. The unit is available in versions with keypad, RFID card reader, fingerprint reader or Bluetooth. Its characteristic design is striking, also being attractive thanks to simple installation and configuration. Naturally, it can also be connected to 2N IP intercoms, gaining you a comprehensive access control system solution which you can manage easily via 2N® Access Commander.



Office buildings
Residential complexes
Hospitals
Educational establishments
Business centres

Hotels and accommodation
State administration public buildings
Other staff premises

Access security

Use 2N Access Unit to prevent unauthorised access to a building, ensuring the highest level of security for all people in the building.

Unit with complete intelligence inside

The 2N Access Unit combines a traditional controller with end access equipment and an IP converter, significantly reducing the costs associated with installation, cabling, and maintenance.

Simple installation

Power over PoE and a single ethernet cable make installation very simple. You can connect a lock, exit button, or open-door sensor directly to the unit.

2N Access Unit



2N® ACCESS UNIT RFID - 125 kHz or 13.56 MHz with NFC

Standalone access unit with RFID card reader ensuring building access control, with support for various types of RFID cards, chips, and other media using 125kHz or 13.56MHz frequencies. The 13.56MHz reader version also supports NFC technology.

- Combination of controller and RFID reader in one device
- Pure IP access system solution
- Door opening via smartphone (with NFC support)



2N® ACCESS UNIT BLUETOOTH

Thanks to Bluetooth technology you no longer need worry about forgotten RFID cards or PIN abuse. Simply open the door with your smartphone, which only needs to be in your pocket or bag, without having to unlock it. The 2N® Mobile Key application must be installed on the mobile device.

- Configurable communication distance
- Two-factor user identification
- High degree of security

Supported modes:

- TAP in App - door-opening by pressing icon in the installed application
- Touch - door-opening by touching access unit (without the need to unlock phone)



2N® ACCESS UNIT FINGERPRINT READER

The access unit has a top-of-the-range, highly reliable optical sensor with fast fingerprint identification. Thanks to its unique design, it provides user comfort during identification and ensures maximum security in the given space.

- Extremely secure user identification method
- False fingerprint detection
- Designed for indoor and outdoor installation



2N® ACCESS UNIT TOUCH KEYPAD

Separate access unit equipped with touch keypad for inputting an access PIN. The unit is equipped with a capacitive touchscreen which reliably records and evaluates every touch.

- Configurable backlighting intensity
- Acoustic response to touch
- Silent alarm activation

2N Access Unit

FEATURES & BENEFITS

Administration via web interface

The Access Control unit simply plugs into your LAN network and, subsequently, can be easily set-up via a web interface.

Higher security of access

To provide maximum security in a protected area outside business hours, two-factor authentication of users may be required, i.e., a combination of two different access technologies.

Tamper protection

2N Access Unit is equipped with a mechanical protective switch. As soon as anyone attempts to damage the unit mechanically, the switch is activated and an alarm is set off.

Entry and exit monitoring

Other expansion modules can be connected to the 2N Access Unit (for example, RFID reader, keypad, Bluetooth etc.), which can secure a door from both sides with ease.


Invalid access data warning

If an invalid card is used to attempt access or an invalid PIN is entered several times, the 2N Access Unit immediately signals a warning to the administrator.

Indoor and outdoor use

You can install the Access Control unit thanks to its mechanical properties not only inside the building, but also in an outdoor environment.

DIAGRAM

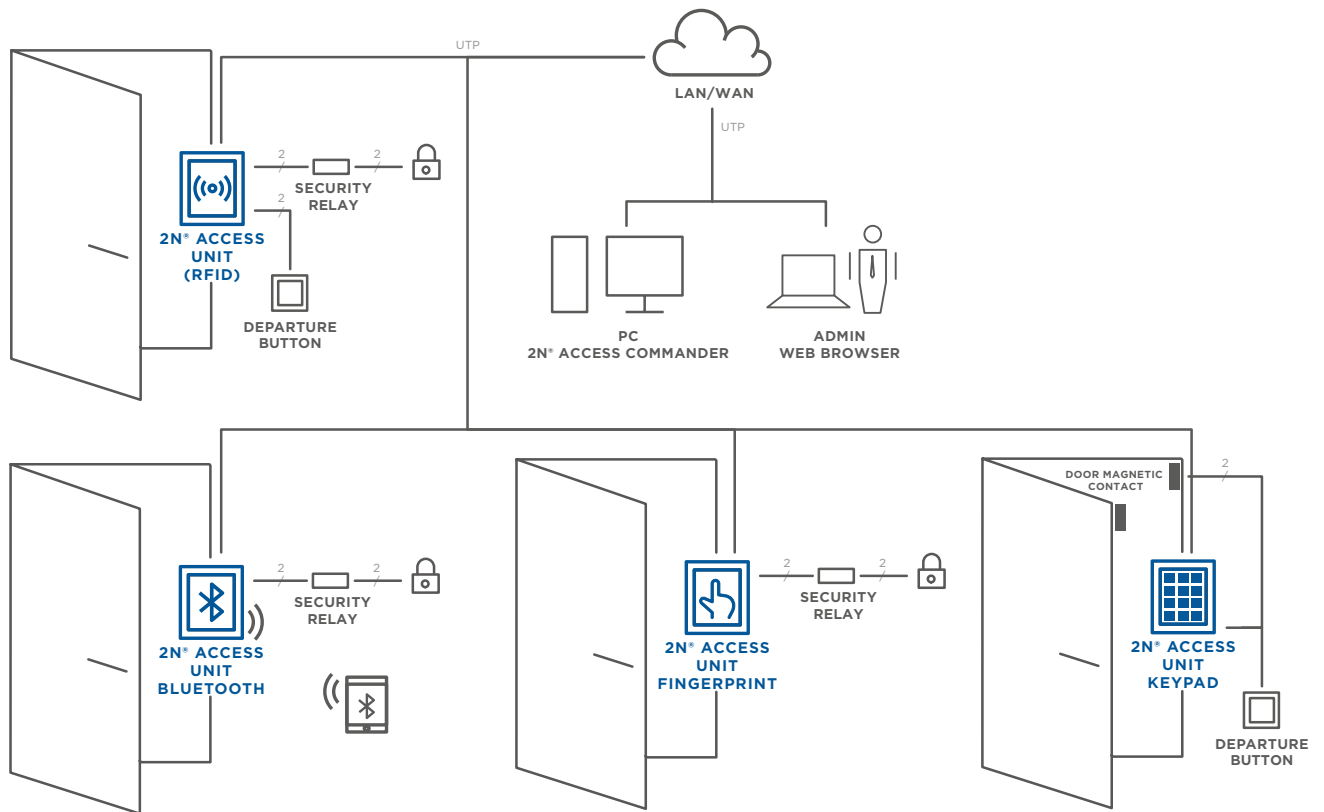

Εάν ενδιαφέρεστε για τα προϊόντα μας, παρακαλούμε καλέστε στο 2310 917 677 ή επικοινωνήστε μαζί μας στο email sales@pnt.gr.

Για περισσότερες πληροφορίες επισκεφτείτε το δικτυακό μας τόπο www.pnt.gr

2N Access Unit



2N® ACCESS UNIT
RFID

ord. 916009 (125kHz)
ord. 916010 (13.56MHz)



2N® ACCESS UNIT
BLUETOOTH

ord. 916013



2N® ACCESS UNIT
FINGERPRINT READER

ord. 916019



2N® ACCESS UNIT
TOUCH KEYPAD

ord. 916016

TECHNICAL PARAMETERS

Audio

Speaker 0.8 W / 8 Ω

Interfaces

Power supply 12V ±15% / 2A DC or PoE
PoE per standard 802.3af (Class 0 - 12.95W)
LAN 10/100BASE-TX with Auto-MDIX, RJ-45, terminal block or pigtail RJ-45
Recommended wiring Cat5e or better
Passive switch NC/NO contacts, max 30 V 1 A AC/DC
Active switch output 8 to 12 V DC / max 400 mA
Inputs 3 inputs - can be used in passive or active mode (-30 V to + 30 V DC)

Expansion modules

Modules supported are from the 2N® IP Verso intercom: RFID reader card (125kHz; 13.56 MHz), touch screen, keyboard, I/O module, Wiegand, etc.

Mobile Application Support

Android 4.4 and higher, iOS 10.3 and higher

Mechanical properties

Cover Rugged zinc die-cast with surface finish
Operating temperature -40°C - 60°C
fingerprint reader
and touch keypad -20 °C - 55 °C
Operating relative humidity 10%-95% (non-condensing)
Storage temperature -40°C - 60°C
fingerprint reader
and touch keypad -20 °C - 60 °C
Coverage level IP54

Dimensions

Frame for surface mounting
1 module 107 (w) x 130 (h) x 28 (d) mm
Frame for in-wall mounting
1 module 130 (w) x 153 (h) x 5 (d) mm
Case for in-wall mounting (minimum size of hole in wall)
1 module 108 (w) x 131 (h) x 45 (d) mm
Weight Max gross weight: 2 kg / max net weight: 0.5 kg (depending on configuration)

2N® ACCESS UNIT RFID - 125 KHZ or 13.56 MHZ with NFC

Supported 13.56 MHz cards
(only the serial number of the card is read)

ISO14443A Mifare Classic 1k & 4k, DESFire EV1, Mini, Plus S&X, SmartMX, Ultralight, Ultralight C, SLE44R35, my-d move (SLE66Rxx), PayPass, Legic Advant
ISO14443B Calypso, CEPAS, Moneo, SRI512, SRT512, SRI4K, SRIX4K, PicoPass, HID iCLASS
Supported NFC devices Smart-phones with NFC and support for HCE (Host Card Emulation), Android version 4.3 and above
Supported 125 kHz cards EM4100, EM4102, HID Prox

2N® ACCESS UNIT BLUETOOTH

Compatible with 4.0 Bluetooth and higher (Bluetooth Smart)
Reception sensitivity up to -93 dBm
Range more than 10 m (configurable)
Consumption 20mA at 12V DC

2N® ACCESS UNIT FINGERPRINT READER

Sensor Optical sensor protected by resistant glass
Reliability Algorithm for fake fingerprint detection
Resistance Resistant to water and dust
Ambient light suppression Also works in direct sunlight
Status signalisation Acoustic and with the aid of multicoloured LEDs
Sensing area Large with dimensions of 15.24 x 20.32 mm
Operating temperature -20°C to 55°C
Certification FBI PIV

2N® ACCESS UNIT TOUCH KEYPAD

Capacitive technology
High touch layer sensitivity (0.1pF)
Regular automatic calibration (SmartSense)
Does not detect false touches on wet surface
Configurable backlighting intensity
Indication using multicoloured LEDs
Acoustic response for every keypad touch

2N® Access Commander - access control and management software for 2N access unit and IP intercoms
2N® Mobile Key - application that convert your smartphone to the access card
2N® Network Scanner - application for detecting 2N IP intercoms and access control units on the network

SOFTWARE



Μουρατίδης Χρήστος
Ρόδου 14, 54453 Κάτω Τούμπα, Θεσσαλονίκη Τηλ: 2310 917 677, E-mail: sales@pnt.gr

www.pnt.gr